


## Screen Print Requirements:

- Gray lines on templates represents the imprint area as stated in catalog. These does not print and should be hidden for final printing.
- Red dashed lines represent the actual imprint area. DO NOT go outside of these lines, or show on any proofs.
- Dashed line on product outline represent placement of imprint area
- Minimum 35% screen tint
- Font size 6 pt. minimum
- Serif fonts may need stroke added, approximately .1 for 10 pt. or smaller text (general guideline, more or less may be needed depending on the size and style of font)
- Line weight .6 minimum
- Any additional product templates/text that are not being used for the current job can be removed from the art file. (text "Standard", "Full Bleed", etc. should not print with the imprint)
- Line weight .35 overlap bleed between colors with exact registration.
- For multiple colors, set up the artwork using the colors to be printed. Keeping a copy as is for placement, make a duplicate of the art/template for each color. Color separate each duplicate changing the color that is being printed to black. Example:

Standard



Location above clip is Pad Printed

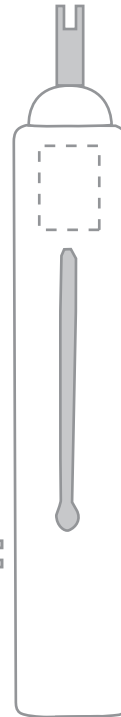

SO \_\_\_\_\_ It Mi8825 Pos \_\_\_\_\_

